
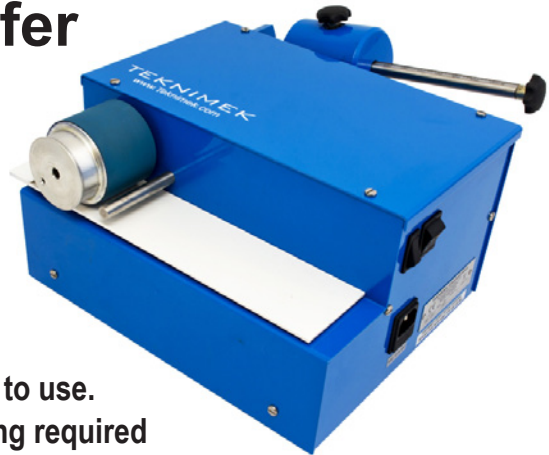


## Ink Proofer

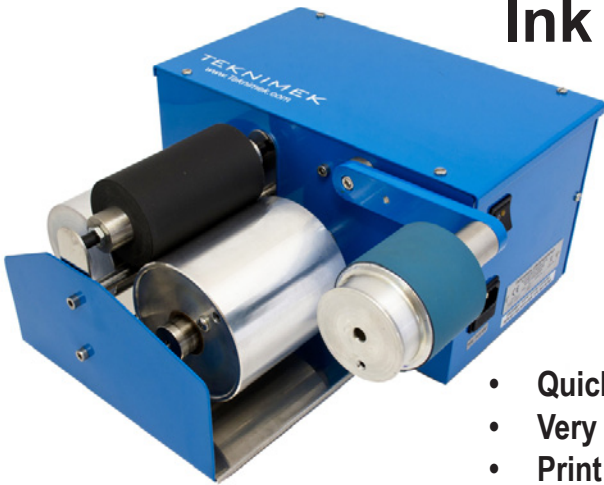

- Quick and easy to use.
- Very little training required
- Print on a variety of substrates
- Repeatable results
- Reliable, Versatile, Portable
- Low maintenance

The Teknimek Proofer System consists of separate Inker and printer units. Their design is the result of many years experience in the production of proofing equipment for the ink industry and is used extensively by both in manufacturers and printers, from small independent to large multinational companies. The Inker is a three roller system, made up of a driving roller, an oscillating roller and a rubber distribution roller which transfers ink to the print disc. The print disc is then transferred to the Printer unit. The material to be printed, which may include paper, card or tin plate is clipped on to substrate carrier and placed on the printing ledge of the Printer. The print disc is then lowered into position and a print produced.

Rating	220-240V. 50hz 0.5A or 100-120V. 60hz. 1A	Weights	Inker	13.2kg
			Printer	11.8kg
Dimension	Inking 30 x 35 x 16.5cm Printer 31 x 35 x 19cm			

### General

Standard Print Disc Weight with Vulcran Rubber Blanket: 170g

UV. Print Disc Weight with EPDM coating: 140g

Standard Print Disc Width: 50mm (narrower widths available)

Print Disc Loading: 0-1000N

Print Speed: 10m/min

Typical Inking up time 1-2mins

PVCN covered distribution rollers are available for conventional Inks.

EPDM covered distribution rollers are available for UV. Inks



• AEROSPACE • AUTOMOTIVE • ELECTRONICS • MARINE • OIL & GAS • PACKAGING • PRINT •

Unit 5H, Blacknest Industrial Estate, Blacknest Road, Alton, Hampshire, UK, GU34 4PX